


## Quick-Loc Coated Discs



Santek Quick-Loc Discs are used for grinding, dressing, deburring, polishing and blending of metal surfaces.

Small and flexible, Quick-Loc discs prove highly effective for stock removal and blending of surfaces in both general and tight spaces.

Available with an option of a plastic male or a female metal, thread button.

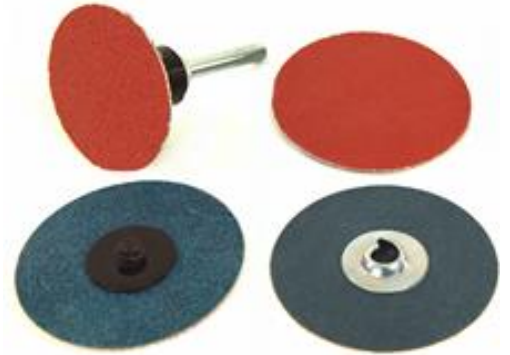

### Safety

Quick-Loc Discs perform best between 20-30m/s, this giving the optimum balance between stock removal, surface finish, cutting temperature and wheel life.

**NB! Excess speed is dangerous and may result in product disintegration, grain shedding and overheating.**

**NEVER USE QUICK-LOC DISCS AT SPEEDS IN EXCESS OF 40m/s!**

Do not use wet or in any coolant or oil.

Use in accordance to ANSI B7.1.

### Standard Sizes Available

Diameter	Alox Brown	Zir Blue	Zir Green	SiC Black	Ceramic Orange
30mm		•	•	•	
50mm	•	•	•	•	•
75mm		•	•	•	•

Diameter	Recommended Speed rpm	Maximum Speed rpm
30mm	10000	16000
50mm	8000	13000
75mm	5000	9000

### Disc Holder



### Standard Grit Sizes Available

Type	Grit	P36	P60	P80	P120	P150	P240	P320	P400	P600
Alox Brown		•	•	•	•	•	•	•	•	•
Zir Blue		•	•	•	•					
Zir Green		•	•	•	•					
SiC Black		•	•	•	•	•	•	•	•	•
Cer. Orange		•	•	•	•					

